

MICROWAVE SWITCH 220V



Features and Benefits

An economical high voltage ON/OFF switch, for 220V, and up to AC 250W
 When it detects human movement, it turns on. The time and distance can be adjusted.
 The detection range is between 3 and 10 meters.

Technical Parameters

Switch



Input Voltage:	AC 220-240V
Ta:	-20 to +50°C
Tc:	+75°C
Size:	L112xW36xH20mm
Weight:	45g

Mircowave Switch



Input Voltaeg	DC 5V
Detection Range:	3-10cm
Signal:	On Off signal
Size:	L19xW13.5xH7mm
Weight:	60g

Code

20400010 MIRCOWAVE SWITCH, 220-240V input/output

Warranty


1 year

Application

Any application that can benefit from a presence detector switch, such as: Buildings, Offices, Airports, Subways, Hospitals, Hotels, etc.

It can be used with LED lamps, electronic ballasts and fluorescent lamps.

Connection Diagram

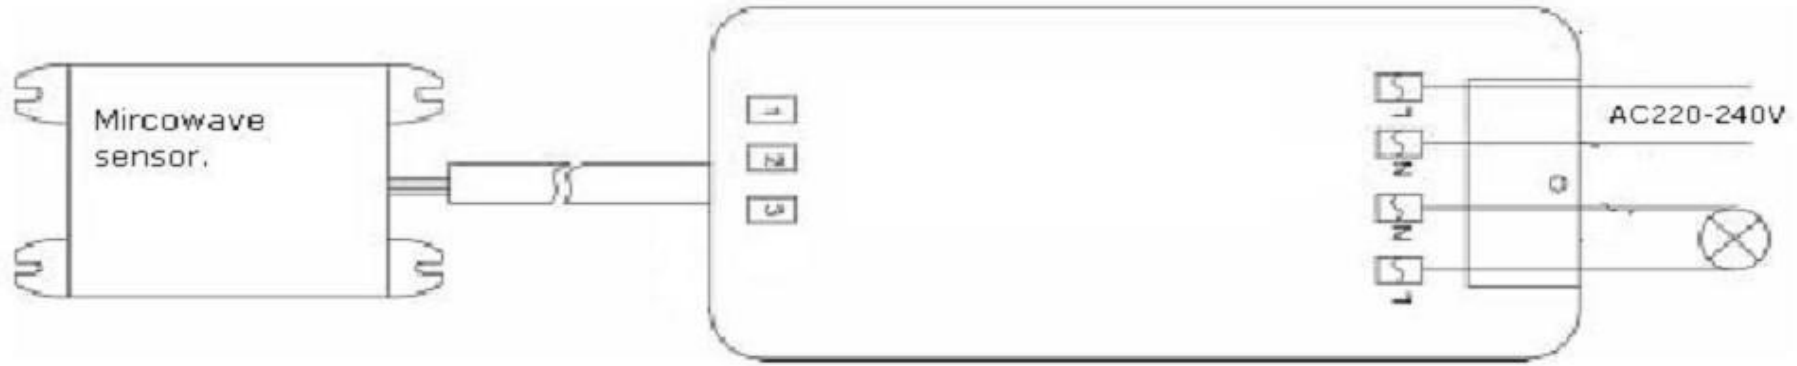

Remark:

1. The delay time can be adjusted. With this feature the luminaire would be turned off once no human presence is detected. The delay can vary between 1 second up to 10 minutes. If any movement is detected during this time, the delay time will be readjusted.
2. Make sure the sensor is not covered with metal --it will block the signal.