


## LED Linear Light



## Features and Benefits

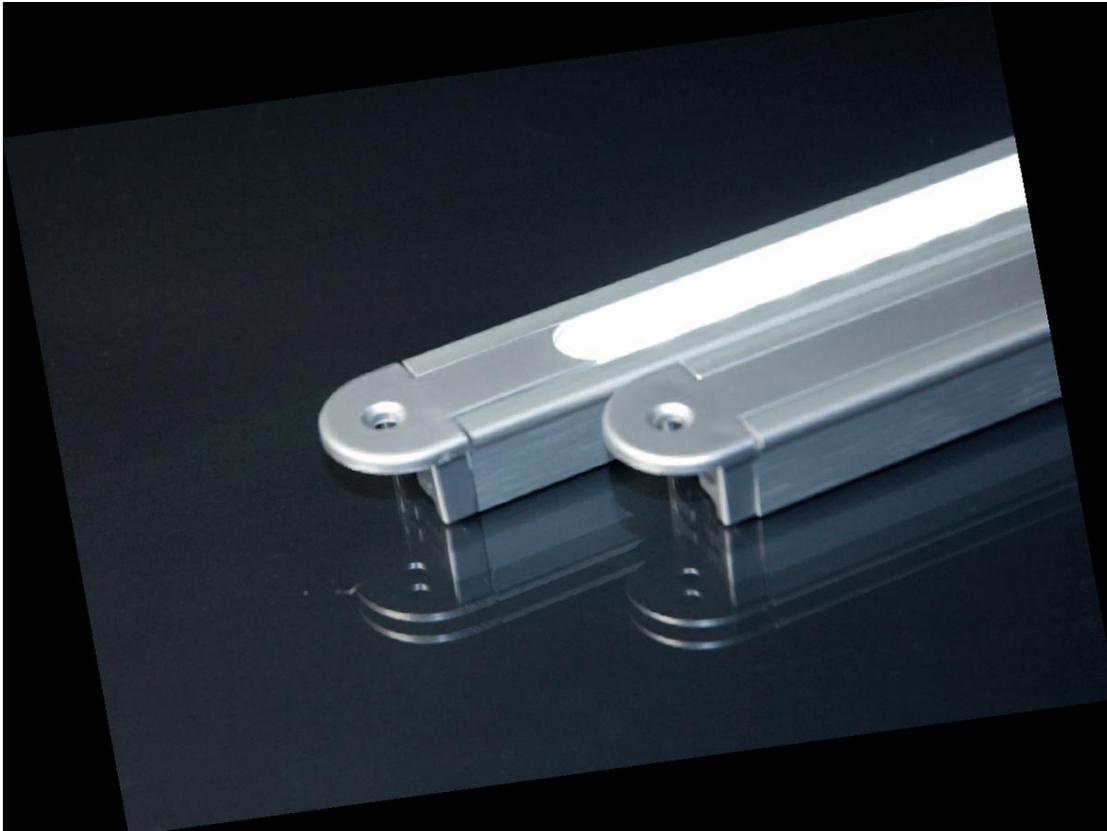

With a covering lip, visby is a suitable to be used in furnitures  
 The items are a simple, convenient and elegant solution for all lighting questions.  
 Optionally, the lamp is also available with touch sensor technology  
 Ready for connection to 12V DC.  
 Material: Aluminum, PMMA  
 Surface: brushed

## Technical Parameters

- wire exit linear and 90° down
- from 2000 mm 2 sided power input
- customized sizes in 50 mm steps to max. 3 m on request
- other configurations, input voltages, connectors and colors on request
- dimmable
- flush mount version with covering aluminum lip
- SMD 3528/5050

## Technical Performance

CODE	REFERENCE	COLOR	COLOR TEMPERATURE or WAVELENGTH	DIMENSION (mm)	LED QTY	LIGHT OUTPUT (lm/m)	BEAM ANGLE (°)	VOLTAGE (V DC)	Efficiency (lm/W)	POWER CONSUMPTION (W)	CONTINUOUS CONNECTION (m)
20490006	LED Linear Light-Cree- 2.5W-WDL-12V-255x18x15mm	WDL	3300K	255x18x15	100	280	90	12	29.0	2.5	3
20490007	LED Linear Light-Cree-2.5W-RGB-12V-255x18x15mm	RGB		255x18x15	60		90	12		2.5	3
20490013	LED Linear Light-Epistar- 2.5W-WDL-12V-255x18x15mm	WDL	3300K	255x18x15	100	280	90	12	29.0	2.5	3
20490014	LED Linear Light-Epistar-2.5W-RGB-12V-255x18x15mm	RGB		255x18x15	60		90	12		2.5	3


## Lifetime & Warranty

- Warranty 2 years

## Applications

Cove light, ceiling light  
 Architectural lights for canopy, corridor, window  
 Lights for showcase, shop window  
 Under or in cabinet lighting  
 Automotive dash light, limo interior decoration  
 Exhibition, fair, events highlight  
 General light replacement  
 Emergency exit path lighting  
 Back or edge light of illumination box, panel, sinage  
 Lighting for cinemas, theatres, museum, yachts, transit bus

## Dimension

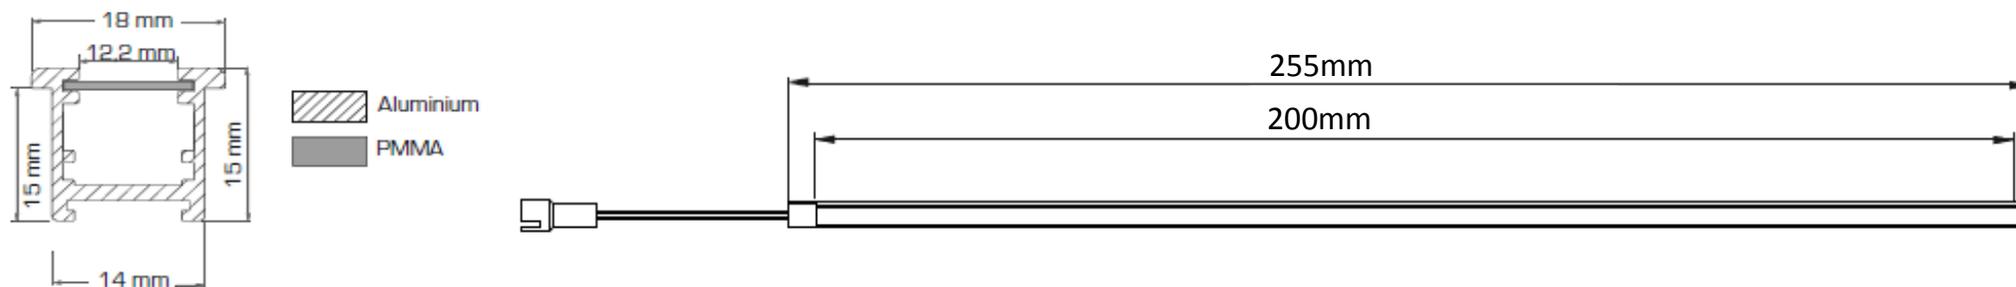

## Assembly

Adequate and proper power supply should be applied.

Power supply with voltage DC 12V is not allowed to use. User can calculate the power consumption according to the electrical data, then decide what power supply should be applied.

3 meters are recommended as the reasonable connection length of the connect LEDlines. If more connected, the brightness will be quite lower.

Controller is necessary to dim or create an animation for fixed color