




IC1051A(CLEAR)



Features and Benefits

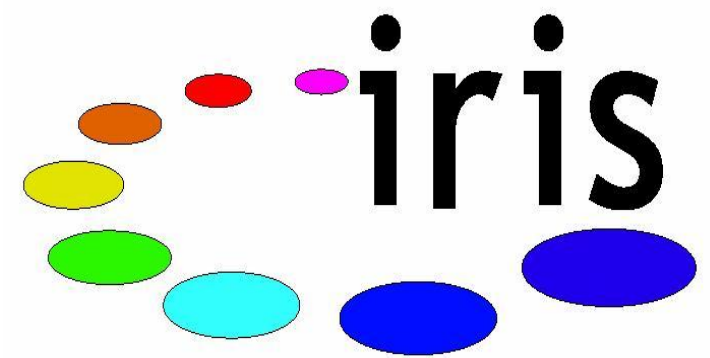

● Waterproof:

6063 aluminum, small and delicacy, easy to hide and invisible.

● Mounting:

fixed by the screws, easy for installation.

● Quality components:

1. Integrated heating solution to guarantee the LED luminous efficiency and life span.
2. Constant 350mA current driver:


Technical Parameter

Product type	IC1051A(clear)
LED	LUMILEDS
Single LED Wattage	1W
LED life span and warranty	50,000 hours, 2 years warranty
LED Quantity	1pc
LED color (single color)	Red Amber Green Blue White Warm White
Beam angle	140 degrees
Reflector	Imported PC material with anti-UV& anti-aging resistance
Housing	6063 aluminum, anode dioxido finish
LED driver	External 350mA constant current driver
Power consumption	1W
Ingress protection	IP66
Classification	III
Ambient operating Temperature	-20°C to +55°C (Ta +10°C)
Net weight	0.067 Kg

Code & Reference

20112242	IC1051A-1X1W-140deg-RE-R(350mA)(Clear)
20112243	IC1051A-1X1W-140deg-RE-G(350mA)(Clear)
20112244	IC1051A-1X1W-140deg-RE-B(350mA)(Clear)
20112245	IC1051A-1X1W-140deg-RE-A(350mA)(Clear)
20112246	IC1051A-1X1W-140deg-RE-WDL(350mA)(Clear)
20112247	IC1051A-1X1W-140deg-RE-NW(350mA)(Clear)
20112248	IC1051A-1X1W-140deg-RE-WW(350mA)(Clear)

Dimensions (mm)

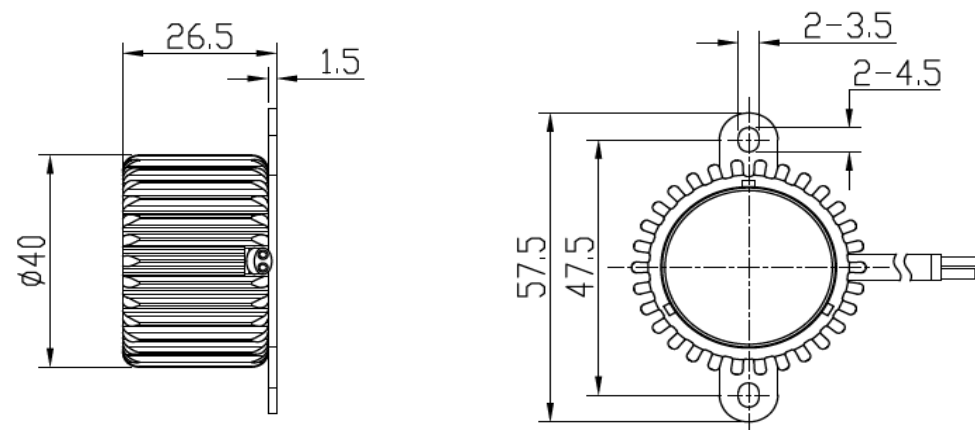

System Control (single color)

