




IC1051B(CRYSTAL)



Features and Benefits

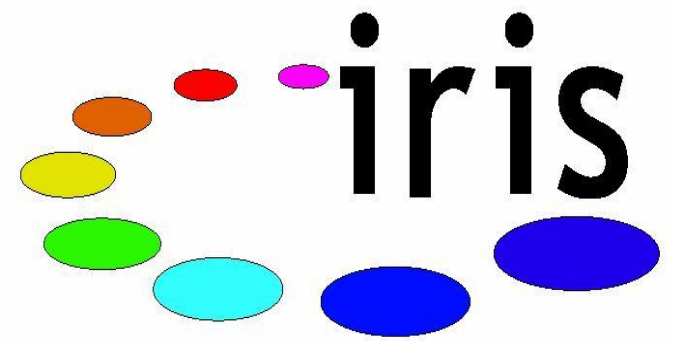

● Waterproof:

6063 aluminum, small and delicacy, easy to hide and invisible.

● Mounting:

fixed by the screws, easy for installation.

● Quality components:

1. Integrated heating solution to guarantee the LED luminous efficiency and life span.
2. Constant 700mA current driver:


Technical Parameter

Product type	IC1051B(crystal)
LED	LUMILEDS
Single LED Wattage	3W
LED life span and warranty	50,000 hours, 2 years warranty
LED Quantity	1pc
LED color (single color)	Red Amber Green Blue White Warm White
Beam angle	140 degrees
Reflector	Imported PC material with anti-UV& anti-aging resistance
Housing	6063 aluminum, anode dioxide finish
LED driver	External 700mA constant current driver
Power consumption	3W
Ingress protection	IP66
Classification	III
Ambient operating Temperature	-20°C to +55°C (Ta +10°C)
Net weight	0.075 Kg

Code & Reference

20112277	IC1051B-1X1W-140deg-RE-R(700mA)(Crystal)
20112278	IC1051B-1X3W-140deg-RE-G(700mA)(Crystal)
20112279	IC1051B-1X3W-140deg-RE-B(700mA)(Crystal)
20112280	IC1051B-1X3W-140deg-RE-A(700mA)(Crystal)
20112281	IC1051B-1X3W-140deg-RE-WDL(700mA)(Crystal)
20112282	IC1051B-1X3W-140deg-RE-NW(700mA)(Crystal)
20112283	IC1051B-1X3W-140deg-RE-WW(700mA)(Crystal)

Dimensions (mm)

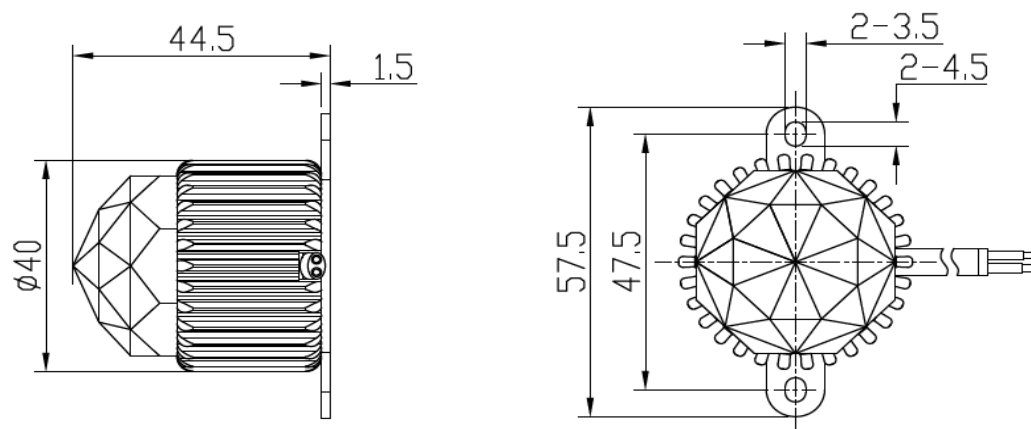

System Control (single color)

