




IC1052A(CRYSTAL)



Features and Benefits

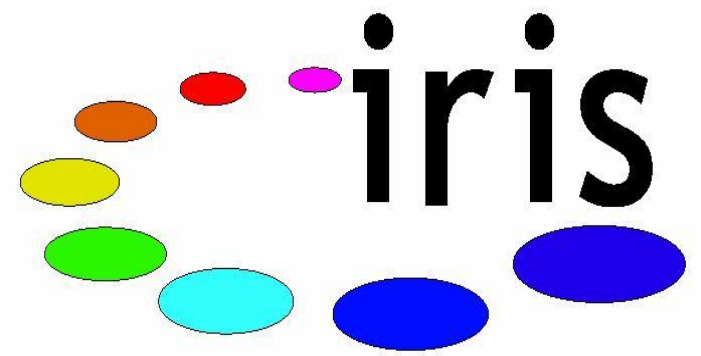

● Waterproof:

Die-cast aluminum, powder paint with high corrosion resistance., small and delicacy, easy to hide and invisible.

● Mounting:

fixed by the screws, easy for installation.

● Quality components:

1. Integrated heating solution to guarantee the LED luminous efficiency and life span.
2. Constant 350mA current driver:


Technical Parameter

Product type	IC1052A(crystal)
LED	LUMILEDS
Single LED Wattage	1W
LED life span and warranty	50,000 hours, 2 years warranty
LED Quantity	3pcs
LED color (single color)	Red Amber Green Blue White Warm White
LED color(color changing)	Red、Green、Blue
Beam angle	140 degrees
Reflector	Imported PC material with anti-UV& anti-aging resistance
Housing	Die-cast aluminum, powder paint with high corrosion resistance.
LED driver	External 350mA constant current driver
Power consumption	3W
Ingress protection	IP66
Classification	III
Ambient operating Temperature	-20°C to +55°C (Ta +10°C)
Net weight	0.42 Kg


Code & Reference

20112316	IC1052A-3X1W-140deg-RE-RGB(350mA)(Crystal)
20112317	IC1052A-3X1W-140deg-RE-R(350mA)(Crystal)
20112318	IC1052A-3X1W-140deg-RE-G(350mA)(Crystal)
20112319	IC1052A-3X1W-140deg-RE-B(350mA)(Crystal)
20112320	IC1052A-3X1W-140deg-RE-A(350mA)(Crystal)
20112321	IC1052A-3X1W-140deg-RE-WDL(350mA)(Crystal)
20112322	IC1052A-3X1W-140deg-RE-NW(350mA)(Crystal)
20112323	IC1052A-3X1W-140deg-RE-WW(350mA)(Crystal)

Dimensions (mm)

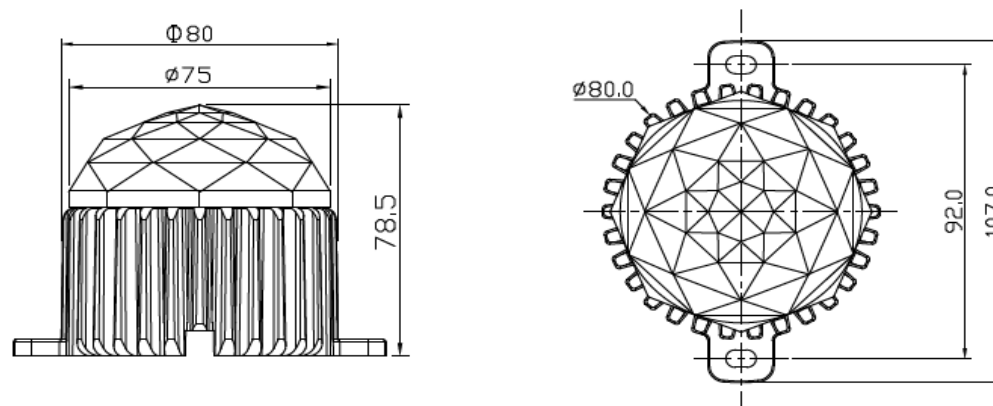

System Control (single color)

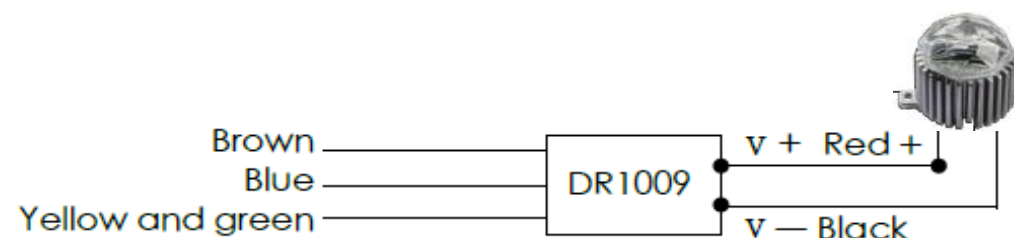

System Control (color changing)

