


FLEXSTRIP Side View IP65



Features and Benefits

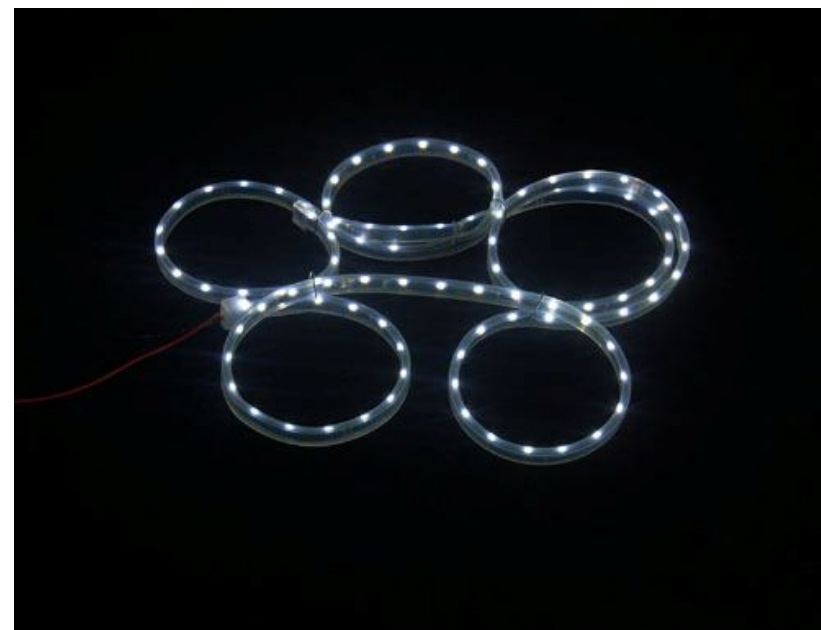

- High illumination output value
- Self Cooling. No heat sink needed
- Can be installed on any surfaces
- Long lifetime and energy saving
- No damaging heat(IR)or UV
- Virtually-free maintenance
- Robust for easy transportation and installation
- Low Voltage 12V DC
- Wide Operating Temperature: From -40°C to +45°C
- Fully Flexible: can be bent to any angle
- Available in all colors
- IP

Lifetime & Warranty

Expected life time 30 000hrs

Warranty 2 years

Packaging




Product Range

Best Value: 60 LEDs/mtr, PRO: 96LEDs/mtr



1 Pack = 1 Roll

1 Roll = 5m

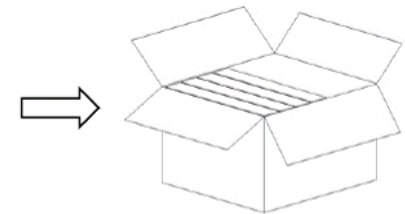

1 Box = 60 Roll = 300m

Technical Performance

Best Value

CODE	Reference	Color	Voltage	Power / Meter (W)	LED Quantity	Cutting Unit	Luminous Flux (lm/mtr)	Color Temperature (K)	Wave Length	Viewing Angle	Operating Temperature	Size (mm)
20250514	FLEXSTRIP BestValue Side View WW 5m/roll IP65	WW	DC12	4.8	300/Roll	3 LED	260 -280	3000-3500K		100-120	—30°C~45°C	5000x10x5
20250517	FLEXSTRIP BestValue Side View NW 5m/roll IP65	NW	DC12	4.8	300/Roll	3 LED	300 - 320	3800-4200K		100-120	—30°C~45°C	5000x10x5
20250513	FLEXSTRIP BestValue Side View WDL 5m/roll IP65	WDL	DC12	4.8	300/Roll	3 LED	340 -360	6000-7000K		100-120	—30°C~45°C	5000x10x5
20250532	FLEXSTRIP BestValue Side View WS 5m/roll IP65	WS	DC12	4.8	300/Roll	3 LED	340-370	8000K		100-120	—30°C~45°C	5000x10x5
20250528	FLEXSTRIP BestValue Side View R 5m/roll IP65	R	DC12	4.8	300/Roll	3 LED	160-180		624-627nm	100-120	—30°C~45°C	5000x10x5
20250529	FLEXSTRIP BestValue Side View A 5m/roll IP65	A	DC12	4.8	300/Roll	3 LED	180-200		590-595nm	100-120	—30°C~45°C	5000x10x5
20250530	FLEXSTRIP BestValue Side View G 5m/roll IP65	G	DC12	4.8	300/Roll	3 LED	200-220		517-523nm	100-120	—30°C~45°C	5000x10x5
20250531	FLEXSTRIP BestValue Side View B 5m/roll IP65	B	DC12	4.8	300/Roll	3 LED	100-120		465-470nm	100-120	—30°C~45°C	5000x10x5

Pro

CODE	Reference	Color	Voltage	Power / Meter (W)	LED Quantity	Cutting Unit	Luminous Flux (lm/mtr)	Color Temperature (K)	Wave Length	Viewing Angle	Operating Temperature	Size (mm)
20250614	FLEXSTRIP PRO Side View WDL 5m/roll IP63 EPOXY with white 3M tape	WDL	DC12	7.68	480/Roll	3 LED	543-576	6000-7000K		100-120	—30°C~45°C	5000x10x5
20250615	FLEXSTRIP PRO Side View WDL 5m/roll IP65 Sleeve with white 3M tape	WDL	DC12	7.68	480/Roll	3 LED	543-576	6000-7000K		100-120	—30°C~45°C	5000x10x5

WW: Warm White NW:Neutral WDL: Day Light WS: White Super R: Red A: Amber G: Green B: Blue

Connection

- Connect to the appropriate switching power supply (DC12V)
- Each 5 meters need a DC12V connection.



Cut to desired length, to the closest cutting mark printed on the product



Expose the adhesive side by removing the cover layer of the double sided tape affixed to the product



Adhere the product to the desired place



Any angle connection



In-line connection



Solder leads to switching power supply

Applications

1. Architectural decorative lighting and backlighting for homes, hotels, marketplaces, bars etc.
2. Auditorium walkway lighting, indoor illuminated signs and advertisements
3. Illumination lighting used for walkway, canopy, stairway accent, amusement park
4. Car interior lights
5. Channel letter lighting used for stores, restaurants, bars

