


LED Ceiling Light 3x1W



Features and Benefits



High Energy Savings
High Colour Rendering
No heat emitted, No IR, No UV
Easy Installation
No Toxic Mercury
Constant Current Driver included

Die-cast aluminium housing

Equipped with high temperature glass or High-performance acrylic

Top-quality CREE LED

Ideal for all kinds of indoor applications

Surface finishing: Brushed black/Brushed silver/Champagne gold

IP20

Lifetime & Warranty

Expected Lifetime 50.000 hrs

Warranty 4 years



Certificates

CE RoHS

EN-60598

EN-55015

EN-61000

EN-61547


Technical Performance

CODE	REFERENCE	COLOR TEMPERATURE	OPERATING WATTS	LED TYPE	SURFACE FINISHING	INPUT VOLTAGE	LUMINOUS FLUX (LM/W)	BEAM ANGLE	CRI
20550004	LED ceiling light 3x1W; WW,100-240V, Type B;brushed black surface	3000k	3x1W	CREE	brushed black	100-240V	90-100	45°	75
20550005	LED ceiling light 3x1W; WW,100-240V,Type C; brushed silver surface	3000k	3x1W	CREE	brushed silver	100-240V	90-100	45°	75
20550006	LED ceiling light 3x1W; WW,100-240V,Type E; champagne gold surface	3000k	3x1W	CREE	champagne gold	100-240V	90-100	45°	75

Dimensions

Dia.86mm x H65mm

Drilling hole in ceiling: Ø75

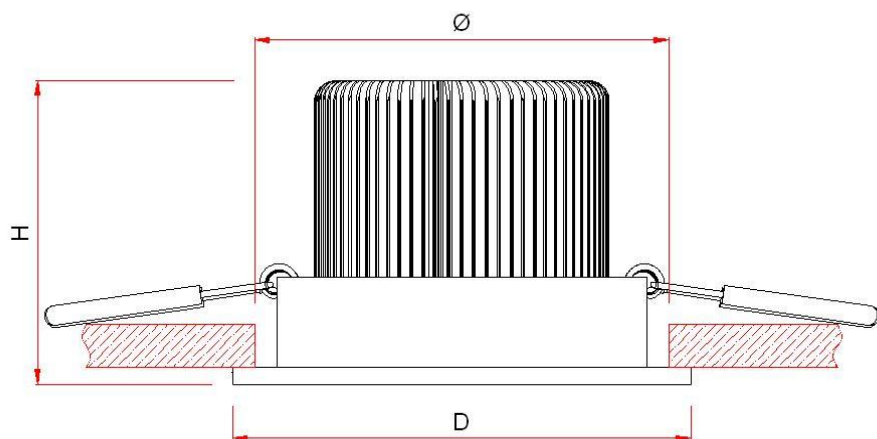

Installation

- Before the installation, make sure the installation area can hold minimum 10 times the device's weight(1kg), 10x1kg=10kg
- Install in no vibration, no swing, no fire hazards and flat areas. Install in places out of people's reach.
- Regarding materials to install it, ensure that screws or other materials used do not exceed the maximum capacity of the device.
- Installation steps:
 1. Drill hole in the ceiling(Ø75)
 2. Connect the driver to the light. Never connect to the power directly
Connect to power AC110-230V
 3. Turn on the spring of the lamp
 4. Upright the lamp and put it into the hole of the ceiling
 5. Release the spring and clamp

