





Mini size Converter for LED 350mA(220V) IP65

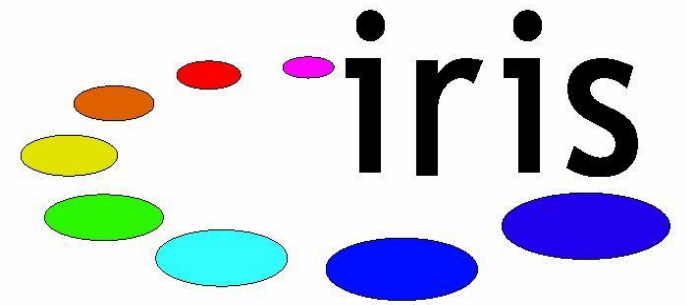

Features and Benefits

- Input & output isolated electrically.
- It is applicable to various of LED products.
- professional cable fix

Product size

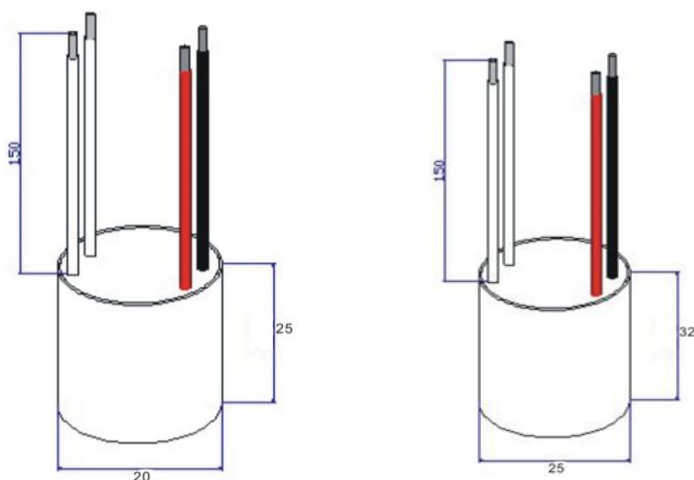

Housing Material: Aluminum	Aluminum(DxH): 20x25mm(20460001) Aluminum(DxH): 25x32mm(20460002)
Input wire model: 2*0.5mm ² White; Length of the wire: 150mm	
Output wire model: 2*0.75mm ² Black & Red; Length of the wire: 150mm	

Code

- 20460001 Mini size Converter for LED 1.4W 350mA(220V) IP65
20460002 Mini size Converter for LED 5W 350mA(220V) IP65

Warranty

2 years

Technical parameters

Input	Input voltage range	AC170~250V
	Operating frequency	50~60Hz
	Input power	≤2.2W(20460001) ≤5W(20460002)
Output	Rate output current	DC350mA±20mA
	Rated output voltage	DC 0~4V(20460001) DC 5~12V(20460002)
	Short circuit protection	output shorted 3 seconds, and will work normally after separated.
	Overload	Protection
Isolation intensity	Input-output	AC 1.5KV/5mA 1Min
	Input-housing	AC 1.5KV/5mA 1Min
Ripple		≤1Vpp (120Hz)
Earth voltage		≤10Vac
IP rating		IP65
Working temperature		-25°C~+40°C
Storage temperature		-25°C~+70°C

Wire connection

INPUT: White wires, no anode and negative limitation.

OUTPUT:


1. Red wire connect anode +
2. Black wire connect negative pole -

Applications


- Building Decoration: Business spaces, airports, subway.
- Indoor Decoration: Lighting and back lighting for hospital, hotel, marketplace, square, dining-room, pub and etc..
- AD solid Word, sign and mark, signboard and billboard.
- Be used as big area back lighting source.
- It is suitable for outdoor LED lighting fixture as well.

Packaging

1. Dimension of inner box

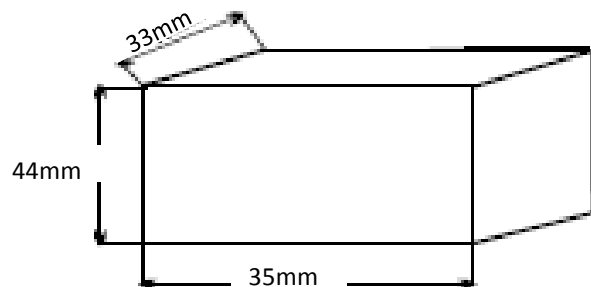

2. Dimension of outer carton

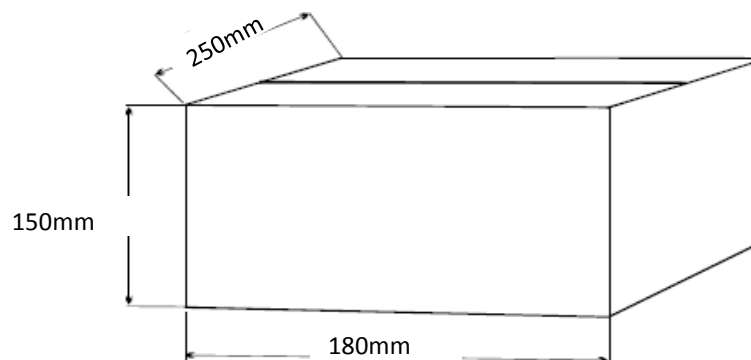

3. Packing: 1pc/ inner box, size: 35*33*44mm;100pcs/ctn, size180*250*150mm.