

IL3033A



IRIS 2002, S.A.  
C/San Agustin, 17 28014 Madrid SPAIN  
T. +34 91 429 42 99 F.+34 91 369 05 93  
[www.irisled.com](http://www.irisled.com)

## Features and Benefits



- **Waterproof:**

Adopt new patent of air filter device for preventing moisture condensation inside the luminaire

- **Mounting:**

Surface mounted, fixed at the bottom.

- **Quality components:**

1. Integrated heating solution to guarantee the LED luminous efficiency and life span.
2. Imported silicon rubber material is adopted for waterproof gask
3. Universal voltage converter: AC100-240V+10%

## Technical Parameter

Product type	IL3033A
LED	LUMILEDS
Single LED Wattage	1W
LED life span and warranty	50,000 hours, 2 years warranty
LED Quantity	3pcs
LED color (single color)	White、 Neutral white、 Warm white
Beam angle	15°, 25°, 40°, 60°
Housing	Stainless steel housing, Stainless steel ring, powder paint with high corrosion resistance
Glass material	8mm thickness tempered glass
Power input	AC100-240V±10%; 50/60Hz
LED driver	350mA constant driver
Power consumption	5W
Anti-static	IEC61000-4 (Level 4)
Ingress protection	IP66
Classification	I
Power cable	3×1.0mm <sup>2</sup> rubber cable
Power factor(PF)	>0.54
Inrush current(MAX)	4A
Ambient operating Temperature	-20°C to +55°C (Ta +10°C)
Net weight	1.5 Kg


## Code & Reference

20113343      IL3033A-3X1W-60deg-RE-WW(AC100-240V)


Available beam angles: 15°, 25°, 40°, 60°



## Dimensions (mm)

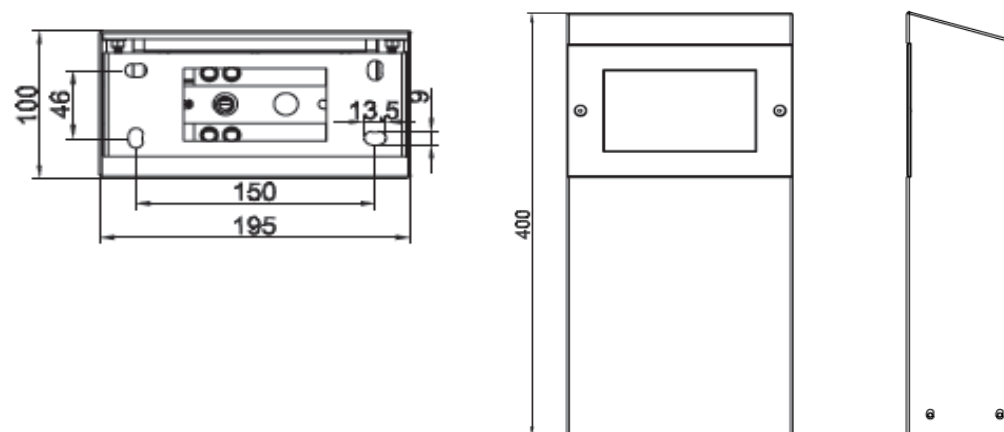

## Wire connection

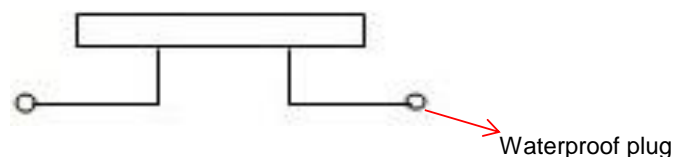

## System Control (single color)



Remarks: Maximum serial connective number of lights is 50PCS, new power cable is needed for over 50PCS;