

## IR SWITCH 220-240V input/output



**Features and Benefits**

It a high voltage ON/OFF switch, Voltage 220-240V . AC 250W max

Detection range is 6cm

**Technical parameters**

Switch



IR Sensor



Input Voltage:	AC 220-240V
Ta:	-20 to +50°C
Tc:	+75°C
Size:	L112xW36xH20mm
Weight:	45g
Funtion:	Detec movement to turn ON/OFF

Input Voltaeg	DC 5V
Detection Range:	3-6cm
Signal:	On Off signal or PWM signal
Size:	Dia 11x29mm
Weight:	16g

**Code**

**20400008**

**IR SWITCH, 220-240V input/output**

**Warranty**

1 year


**Application**

Building Decoration: business spaces. Airports, Subways

Indoor Decoration: Lighting and back lighting for hosipital, hotel,marketplaces, square, dinning-room, put and etc..

Halogen LED lamps: Electronics ballast,fluorescent lamp

Connection Diagram

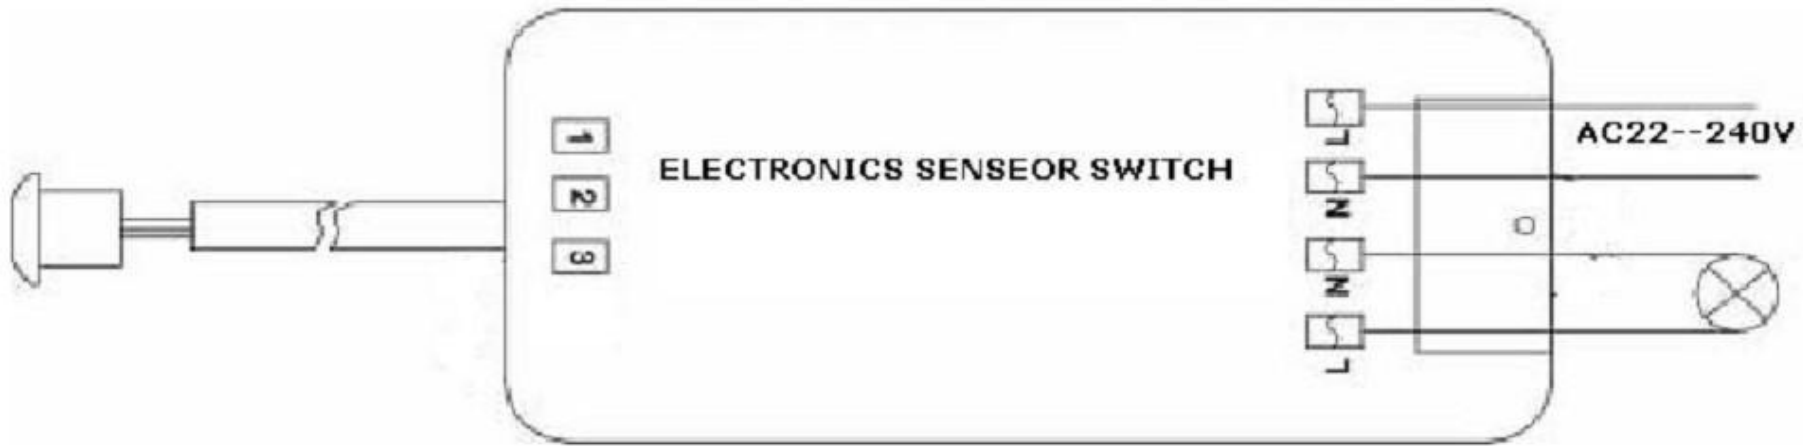

Remark:  
1. don.t cover the sensor with anything.